Beryllium Series

KN-6482B

4K NVR

C6B2

قابلیت ارایه فرم ور امنیتی جهت استفاده در مراکز فوق حساس و نظامی - فاقد قابلیت دسترسی از طریق اینترنت

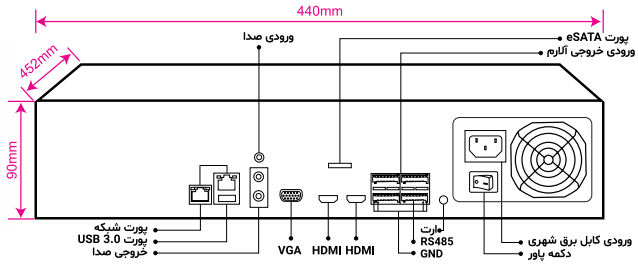

پشتیبانی از قابلیت‌های هوشمند:

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- گم شدن اشیاء
- اضافه شدن اشیاء
- تردد شمار افراد
- تشخیص چهره
- تشخیص حرکت
- تشخیص انسان
- جستجوی هوشمند تصاویر
- تشخیص حرکت سریع افراد
- تشخیص پوشاندن دوربین
- تشخیص تغییر زاویه دوربین
- تشخیص پارک غیر مجاز خودرو
- تشخیص پرسه زنی افراد
- تشخیص صدای غیر عادی
- تشخیص عدم فوکوس لنز
- تشخیص تجمع افراد
- تشخیص خودرو

سایر برتری‌ها:

- امکان گسترش نرم افزاری به درخواست مصرف کنندگان
- نرم افزارهای موبایل و ویندوز حرفه‌ای به زبان فارسی و انگلیسی
- استفاده از CPU و Ram بیشتر نسبت به سایر برندها
- بالاترین سطح پشتیبانی از دوربین های سایر برندها
- سیستم عامل به زبان فارسی و انگلیسی
- وب نویسی به زبان فارسی و انگلیسی
- عملکرد ANR با دوربین‌های کی دی تی
- مدیریت پهنای باند، **تکنولوژی اختصاصی برند کی دی تی** (SBMS)
- پشتیبانی از Failover با ذخیره سازهای کی دی تی

3 years Platinum Guarantee

- **سه سال گارانتی پلاتینیوم بدون قید و شرط کی دی تی شامل:**
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

CPU & Capabilities	
CPU	**Dual-Core ARM Cortex-A17@1600 MHz**
IP Channel Input	**64CH x 4K@30fps(Up to 12 MP Supported)**
Video & Audio	
HDMI Output	**2CH** / 1CH **4K** (3840 × 2160) , 1CH **Full HD** (1920 × 1080)
VGA Output	**1CH** x **Full HD** (1920 × 1080)
Audio Input/ Output	**1CH** Input, **1CH** Output
Recording	
Video Compression	H.264+(Ultra H.264), H.265+ **(Ultra H.265) Smart Event Codec**
Audio Compression	G.711A, G.711U
Video Resolution	**12MP**, 8MP, 5MP, 4MP, 3MP, 1080P, 720P, VGA, 4CIF, DCIF, 2CIF, CIF, QCIF
Input Bandwidth	**320~500**Mbps **(Smart Bandwidth Management System)**
Record Mode	Manual, Schedule, Alarm, Event, Smart Event
Failover	**N+1 Hot Spare**
Pre & Post Record	Pre 1~30 sec, Post 10~300 sec
Playback & Backup	
Sync Playback	**16CH Sync Playback(Up to 4K@30fps)**
Search Mode	Time & Date, Motion , Alarm Input, All Smart Function
Playback Mode	Normal, Time Division, Label, Event, Picture Playback, Smart Playback, **ANR Support**
Backup Mode	USB Device, Network, Internal Sata Burner
Network & Monitoring	
Protocols	HTTPs, HTTP, **TCP/IP V4-V6,** ICMP, RTSP, UDP, NTP, DHCP,DDNS, FTP, SNMP-V1-V2-V3, UPNP, **P2P**, NAT, Multi Cast
Compatibility	**Onvif Ver2.6,** Profile S, G, T, CGI, SDK, API
Output Bandwidth	**100~300**Mbps **(Smart Bandwidth Management System)**
User	32 Users
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Windows Software	Unlimited KDT CMS/VMS 128CH Per Monitor
Smart Device	IOS, Android Phone & Tablet

Hard Disk	
HDD	**8** Sata HDD
Capacity	Up To 14 TB For Each HDD
Raid Support	Mirror
Group HDD	Yes
External Interface	
Network	**2** x RJ45(10/100/1000Mbps)+**LED Indicator**
Wifi / 4G Dongle	Supported
Interface	Front Panel: **2 × USB 2.0** / Rear Panel: **1 × USB 3.0**
eSATA	**1**
Alarm In / Alarm Out	16/4
Controller	2 x RS-485 Interface
Smart Function	
Intelligent Function	**20 Smart Function** Line Crossing, Area Intrusion, Face Detection, Audio Exception Detection, Unattended Objects, Object Missing, Region Entrance, Region Exiting, Fast Moving, Loitering Detection, People Gathering Detection, Parking Detection, Blurred Detection, Scene Change Detection, People Counting, Video Shelter, Motion Detection, Human Detection, Car Shape Detection
General	
Power Supply	200~240V AC, 50~60Hz
Power Consumption	≤30 W Without Hard Disk
Working Environment	-20°C ~ +50°C / 10% ~ 90% RH (Non condensing)
Rackmount	Yes 2 Unit
Dimension (W×D×H)	440*452*90 mm
Weight	7.3 Kg Without HDD
Guarantee	
Product Guarantee	3 Years Platinum Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)

1402-S3

بدون اطلاع قبلی حق تغییر در شکل ظاهری و ارتقا مشخصات فنی محفوظ می باشد.