

# KI-D42XL50F-i30

## Light Ecoline Series


E801

### IP Camera

قابلیت ارایه فرم و امنیتی جهت استفاده در مراکز فوق حساس و نظامی - فاقد قابلیت دسترسی از طریق اینترنت



1401-S1

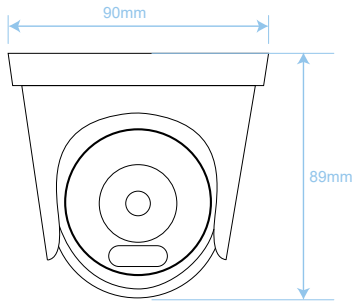

#### سایر برتری‌ها:

- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند

**2 years Silver Guarantee**

- دو سال گارانتی نقره‌ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

Camera	
Image Sensor	<b>5MP</b> Progressive scan Cmos Sensor (1/2.7")
CPU	Single-Core ARM Cortex-A7@750MHz
Lens	<b>3.6 mm Fixed Lens @F2.0</b> (2.8 mm Optional)
Resolution	2592× 1944 ( <b>5MP</b> )
Available IR Range	<b>30~40 M Smart</b> IR SMD (Array) (Philips) Technology
D/N Filter	IR cut filter with auto switch
Min Illumination	<b>Color: 0.01 Lux</b> (AGC on) - B/W: 0.0 Lux(IR on)
Angle of View	<b>H-FOV: 82°-(94°), V-FOV: 43°-(69°), D-FOV: 92°-(119°)</b>
StarLight View	N/A
Picture Adjust	
Picture Function	<b>DWDR, BLC, HLC, Defog, ROI, Rotate</b>
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), <b>H.265+ (Ultra H.265)</b> Smart Event Codec
Audio Compression	N/A
Frame Rate(60Hz)	<b>20fps@ 5MP</b> , 25fps@ 4MP, 30fps@ 2MP
Transmission Stream	<b>Dual Stream</b> (Video Bit Rate:11 Kbps~10 Mbps)
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, UPnP-TM, <b>P2P</b> , Bonjour, IPV6 (NO FTP)
Compatibility	<b>Onvif Ver2.6</b> , Profile S, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Smart Device	IOS, Android Phone & Tablet

Function	
Recording	NVR, CMS, VMS
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Event	Motion Detection, Video Shelter
Intelligent Function	N/A
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
Audio	N/A
Alarm	N/A
CVBS	N/A
Power	<b>PoE</b> LAN, DC In
Control	N/A
Memory Slot	N/A
General	
IP Rating	<b>IP67</b>
Power Supply	DC12V ± 10%
POE Supply	<b>IEEE802.3af - Max 6.5 Watt</b>
Web Language	English, <b>Persian</b>
Dimension	90*89 mm
Weight	230 g
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-45°C ~ +75°C
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	150K hrs min- MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR