

KI-D47XL20F-i30TS

Smart Ecoline Series


F1.41

IP Camera

قابلیت ارایه فرم و امنیتی جهت استفاده در مراکز فوق حساس و نظامی - فاقد قابلیت دسترسی از طریق اینترنت



1401-S1

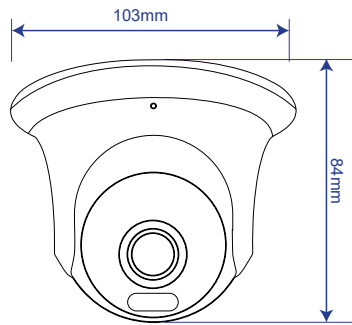

سایر برتری‌ها:

- پشتیبانی از میکرو SD با ظرفیت 256Gb
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog
- پشتیبانی از ضبط اضطراری ANR

قابلیت‌های هوشمند:

- عبور از خط
- فنس‌مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص حرکت سریع
- تشخیص چهره

2 years Silver Guarantee

- دو سال گارانتی نقره‌ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

| Camera | |
|-------------------------|--|
| Image Sensor | 2MP (Sony-Japan) Progressive scan Cmos Sensor (1/2.8") |
| CPU | Dual-Core ARM Cortex-A7@ 900 MHz |
| Lens | 3.6mm Fixed Lens @F1.6, (2.8 mm Optional) |
| Resolution | 1920*1080 (2MP) |
| Available IR Range | 30~40 M Smart IR SMD (Philips) Technology |
| D/N Filter | IR cut filter with auto switch |
| Min Illumination | Color: 0.01 lux - B/W: 0.0 Lux(IR on) |
| Angle of View | H-FOV: 81°-(96°), V-FOV: 64°-(79°), D-FOV: 95°-(110°) |
| StarLight View | Yes-Color |
| Picture Adjust | |
| Picture Function | 120 db WDR/DWDR, BLC, HLC, Defog, ROI, Rotate |
| Shutter Speed | Manual (1/3 ~ 1/10.000), Auto |
| Image Parameter Control | Off, On, Timing (Adjust 0 ~ 255) |
| D/N Control | Timing, Auto, Color on, Color off |
| Image Parameter | Saturation, Brightness, Contrast, Sharpness, Hue |
| Video / Audio | |
| Video Compression | H.264+(Ultra H.264), H.265+ (Ultra H.265) Smart Event Codec |
| Audio Compression | G.711A, G.711U |
| Frame Rate(60Hz) | 30fps@ 2MP (1920*1080) , 30fps@ 960 P, 30fps@ 720 P |
| Transmission Stream | Triple Stream (Video Bit Rate:11 Kbps~10 Mbps) |
| Network | |
| Protocols | TCP/IP(v4, v6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P , Bonjour, SNMP (v1, v2, v3), UDP, NAT, Multicast |
| Compatibility | Onvif Ver2.6 , Profile S, CGI, SDK, API |
| Streaming Method | Unicast, Multicast |
| Web Viewer | Internet Explorer |
| Smart Device | IOS, Android Phone & Tablet |

| Function | |
|----------------------|--|
| Recording | FTP, NVR, CMS, VMS, SD Card, ANR |
| Record Type | Manual, Motion Detection, Smart Detection, Schedule |
| Alarm Triggers | All Intelligent Function |
| Event Action | Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message |
| Event | Motion Detection, Video Shelter |
| Intelligent Function | 6 Smart Function Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving, Face Detection |
| Interface | |
| Network | 1 RJ45 (10M / 100M) Ethernet Port |
| Audio | Audio In, Audio Out |
| Alarm | N/A |
| CVBS | N/A |
| Power | PoE LAN, DC In |
| Control | N/A |
| Memory Slot | Yes - Micro SD/SDHC/SDXC Slot (256 Gb Max) (ANR Support) |
| General | |
| IP Rating | IP67 |
| Power Supply | DC12V ± 10% |
| POE Supply | IEEE802.3af - Max 7.5 Watt |
| Web Language | English, Persian |
| Dimension | 103*84 mm |
| Weight | 380 g |
| Operation Humidity | Humidity 95% or less (non-condensing) |
| Operation Temp | -45°C ~ +75°C |
| Guarantee | |
| Product Guarantee | 2 Years Silver Guarantee |
| MTBF | 150K hrs min- MIL-HDBK-217F (25°) |
| Certificates | EN, CN, FCC, CFR |