

KI-S280XL80Z36-i250TS

Smart Titanium Series


EEOB

IP Camera

قابلیت ارایه فرم و امنیتی جهت استفاده در مراکز فوق حساس و نظامی - فاقد قابلیت دسترسی از طریق اینترنت



1401-S1

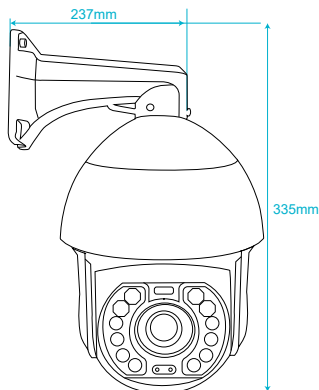

سایر برتریها:

- پشتیبانی از میکرو SD با ظرفیت 256GB
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog و ROI تا ۸ ناحیه
- پشتیبانی از ضبط اضطراری ANR

قابلیت‌های هوشمند:

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص چهره
- تشخیص بدن
- تشخیص حرکت سریع افراد
- تشخیص شکل خودرو

5 years Gold Guarantee

- پنج سال گارانتی طلایی بدون قید و شرط کی تی
- شش سال ضمانت پایداری کیفیت تصویر

Camera	
Image Sensor	8MP Starlight (Sony-Japan) Cmos Sensor (1/1.8")
Case Size	8"
CPU	Dual-Core ARM Cortex A7@900MHz
Lens	36X Optical Lens (6~216mm)
Resolution	3840*2160 (8MP)
Available IR Range	250~260 M Smart IR 12pcs Aray (Philips) Technology
D/N Filter	IR Cut Filter Switch (ICR)
Min Illumination	Color: 0.001 Lux(AGC on) - B/W: 0.0 Lux(IR on)
PTZ	Pan Range: 360° Endless - Pan Speed: 0.1~120°/S Tilt Range: -10°~90° Auto Flip - Tilt Speed: 0.1~60°/S Number of Preset: 255 - Patrol: 32 - Pattern: 8 - Park Action: Yes
StarLight View	Yes-Color
Picture Adjust	
Picture Function	120 db WDR/DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog
Digital Zoom	16X
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265)
Audio Compression	G.711A, G.711U
Frame Rate(60Hz)	30fps@ 8MP(3840*2160), 30fps@ 6MP, 30fps@ 2MP
Transmission Stream	Triple Stream (Code Rate: 32kb-16mb)
Network	
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP, RTCP,NTP,IGMP,UPnP,SMTP,UPnP-TM,P2P,Bonjour
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Recording Software	Unlimited KDT CMS/VMS 128CH Per Monitor

Function	
Recording	FTP, NVR, CMS,VMS, NAS, SD Card, ANR
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, Snapshot, Recording, Alarm Out
Event	Motion Detection, Video Shelter
Intelligent Function	10 Smart Function Line Crossing, Area Intrusion, Unattended Object, Object Missing, Region Entrance, Region Exiting, Fast Moving, Human Detection, Vehicle Detection, Face Detection
Interface	
Network	RJ45(10/100Mbps) Ethernet Port
Audio	Audio Out, Audio In
Alarm	Alarm Out, Alarm In
CVBS	N/A
Power	PoE LAN, DC/AC In
Control	RS485, Joystick Control
Memory Slot	Built-in Micro SD/SDHC/SDXC slot, up to (256GB)
General	
IP Rating	IP67, 6KV Surge Protection
Power Supply	AC24 V ± 25% (3A Max)
POE Supply	IEEE802.3at-Max 25 Watt
Web Language	English, Persian
Dimension	237*335 mm
Weight	5.2 kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-55°C ~ +85°C
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	150K hrs min- MIL-HDBK-217F (25°)