


*نکته: فقط پایه دیواری به همراه محصول ارائه می گردد.

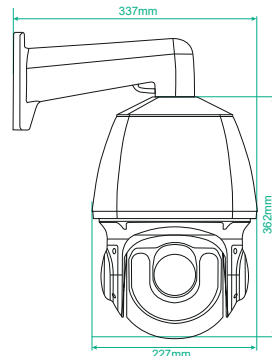

2021-Q2

**2 years
Silver
Guarantee**

- دو سال گارانتی نقره‌ای بدون قید و شرط کی تی
- سه سال ضمانت پایداری کیفیت تصویر

سایر برتری‌ها:

- پشتیبانی از میکرو SD با ظرفیت 256Gb
- بدنه ضد آب و گرد و غبار با درجه IP67
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.4
- قابلیت WDR, BLC, HLC, Defog

قابلیت‌های هوشمند:

- عبور از خط
- ورود به منطقه
- تشخیص حرکت

Camera	
Image Sensor	4MP Cmos Sensor (1/2.8")
Case Size	8"
CPU	Dual Core ARM Cortex-A7@ 900MHz
Lens	33X Optical Lens (5.3~175mm)
Resolution	2592*1520 (4MP)
Available IR Range	150~200M Smart IR SMD Technology
D/N Filter	Dual Filter Switching
Min Illumination	Color: 0.01 Lux(AGC on) - B/W: 0.0 Lux(IR on)
PTZ	Pan Range: 0°~360° Endless - Pan Speed: 0°~170°/S Tilt Range: 0°~95° - Tilt Speed: 0°~80°/S Number of Preset: 255 - Patrol: 8 - Pattern: 8 - Park Action: NO
StarLight View	Yes-Color
Picture Adjust	
Picture Function	120db WDR, DWDR, BLC, HLC, Defog, ROI, 3D DNR
Digital Zoom	16X
Shutter Speed	Manual (1/25 ~ 1/100.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 100)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Brightness, Contrast, Saturation, Sharpness, Chroma
Video / Audio	
Video Compression	H.264, H.265
Audio Compression	G711A, AAC, G726, G711U
Frame Rate(60Hz)	30fps@1080P, 30fps@4MP
Transmission Stream	Triple Stream (Code Rate: 128kb-16mb)
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTP, PPPoE, NTP, UPnP, IGMP, QoS, SR, TMP, IPV6
Compatibility	Onvif Ver2.4 , Profile S, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Recording Software	Unlimited KDT CMS/VMS 128CH Per Monitor

Function	
Recording	Local , SD card ,FTP
Record Type	Timed Recording, Alarmed Recording, ,Inspection Recording
Alarm Triggers	External Alarm
Event Action	Motion Detection Video Occlusion
Intelligent Function	3 Smart Function Line Crossing, Entering The Area, Motion Detection
Interface	
Network	RJ45(10/100Mbps)
Audio	Audio Out, Audio In
Alarm	Alarm Out, Alarm In
CVBS	Yes
Power	High PoE LAN, DC/AC In
Control	RS485, Joystick Control
Memory Slot	Yes - Micro SD (256Gb Max)
General	
IP Rating	IP67, IK10, 3KV Surge Protection
Power Supply	AC24V ± 25%
POE Supply	IEEE802.3bt-Max 57W(1-18A)
Web Language	English, Persian
Dimension	237*362*227 mm
Weight	6.5 kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +70°C
Guarantee	
Product Warranty	2 Years Silver Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)