


KI-D45XL60F

Smart Titanium Series

IP Camera



2021-Q2

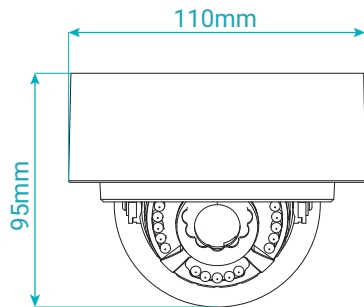

سایر برتری‌ها:

- پشتیبانی از میکرو SD با ظرفیت 256GB
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.265+ / H.264+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog
- پشتیبانی از ضبط اضطراری ANR

قابلیت‌های هوشمند:

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- گم شدن اشیاء
- اضافه شدن اشیاء
- تردد شمار افراد
- تشخیص چهره
- تشخیص حرکت
- تشخیص پوشاندن دوربین
- تشخیص تغییر زاویه دوربین
- تشخیص پارک غیر مجاز خودرو
- تشخیص پرسه زنی افراد
- تشخیص صدای غیر عادی
- تشخیص عدم فکوس لنز
- تشخیص تجمع افراد
- تشخیص انسان

5 years Gold Guarantee

- پنج سال گارانتی طلایی بدون قید و شرط کی تی
- شش سال ضمانت پایداری کیفیت تصویر

| Camera | |
|-------------------------|---|
| Image Sensor | 6MP Starlight (Sony-Japan) Cmos Sensor (1/2.8") |
| CPU | Dual-Core ARM Cortex-A7@900MHz |
| Lens | 3.6mm Fixed Lens - (2.8mm Optional)* |
| Resolution | 3200*1800 (6MP) |
| Available IR Range | 30~35M Smart IR SMD (Osram-Germany) Technology |
| D/N Filter | IR Cut Filter Switch (ICR) |
| Min Illumination | Color: 0.003 Lux(AGC on) - B/W: 0.0 Lux(IR on) |
| Angle of View | H-FOV: 81°-(96°)* , V-FOV: 64°-(79°)* , D-FOV: 95°-(110°)* |
| StarLight View | Yes-Color |
| Picture Adjust | |
| Picture Function | 120db WDR, DWDR, BLC, HLC, Defog, ROI |
| Shutter Speed | Manual (1/3 ~ 1/10.000), Auto |
| Image Parameter Control | Off, On, Timing (Adjust 0 ~ 255) |
| D/N Control | Timing, Auto, Color on, Color off |
| Image Parameter | Saturation, Brightness, Contrast, Sharpness, Hue |
| Video / Audio | |
| Video Compression | H.264+(Ultra H.264), H.265+ (Ultra H-265) Smart Event Codec |
| Audio Compression | G.711A, G.711U |
| Frame Rate(60Hz) | 30fps@960P, 30fps@1080P, 30fps@6MP (WDR ON) |
| Transmission Stream | Triple Stream (Code Rate: 128kb-10mb) |
| Network | |
| Protocols | HTTPs, HTTP, TCP/IP V4-V6, ICMP, RTSP, UDP, NTP, DHCP, DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast |
| Compatibility | Onvif Ver2.6, Profile S, CGI, SDK, API |
| Max Users | 10 Users |
| Streaming Method | Unicast, Multicast |
| Web Viewer | Internet Explorer |
| Recording Software | Unlimited KDT CMS/VMS 128CH Per Monitor |
| Smart Device | IOS, Android Phone & Tablet |

| Function | |
|----------------------|--|
| Recording | FTP, NVR, CMS, NAS, SD Card, ANR |
| Record Type | Manual, Motion Detection, Smart Detection, Schedule |
| Alarm Triggers | All Intelligent Function |
| Event Action | Email, PTZ, Snapshot, Recording, Alarm Out, Buzzer, Pop up, Show Message |
| Intelligent Function | 18 Smart Function Line Crossing, Area Intrusion, Face Detection, Audio Exception Detection, Unattended Objects, Object Missing, Region Entrance, Region Exiting, Fast Moving, Loitering Detection, People Gathering Detection, Parking Detection, Blurred Detection, Scene Change Detection, People Counting, Video Shelter, Motion Detection, Human Detection. |
| Interface | |
| Network | RJ45(10/100mbps)+LED Indicator on Cable |
| Audio | Internal Mic, Audio Out, Audio In |
| Alarm | Alarm Out, Alarm In |
| CVBS | Yes |
| Power | PoE LAN, DC In |
| Control | N/A |
| Memory Slot | Yes - Micro SD (256Gb Max) (ANR Support) |
| General | |
| IP Rating | IP67, IK10 |
| Lens Cover | Nano Glass |
| Power Supply | DC12V ± 25% |
| POE Supply | IEEE802.3af - Max 7.8Watt |
| Web Language | English, Persian |
| Dimension | 110*95 mm |
| Weight | 579 g |
| Operation Humidity | Max Up to 95%RH(Non Condensing) |
| Operation Temp | -45°C ~ +75°C |
| Guarantee | |
| Product Guarantee | 5 Years Gold Guarantee |
| MTBF | 100K hrs min- MIL-HDBK-217F (25°) |
| Certificates | EN, CN, FCC, CFR |