

E801

## KI-B22LE50F-i30M




قابلیت های هوشمند

- سه سال گارانتی پلاتینیوم بدون قید و شرط کی تی
- چهار سال ضمانت پایداری کیفیت تصویر

سایر برتری ها

- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.265+ / H.264+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت DWDR, BLC, HLC, Defog
- امکان سفارش یا نرم افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهینامه.

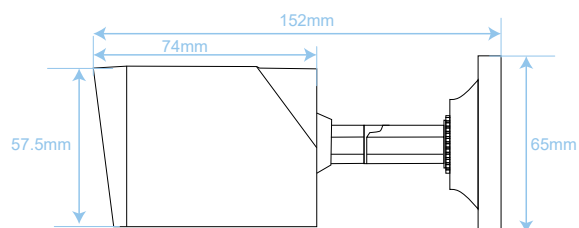

| Camera                  |                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------|
| Image Sensor            | 5MP Progressive scan Cmos Sensor (1/2.7")                                                                      |
| CPU                     | Single-Core ARM Cortex-A7@750MHz                                                                               |
| Lens                    | 3.6 mm Fixed Lens @F2.0                                                                                        |
| Resolution              | 2592*1944 (5MP)                                                                                                |
| Available IR Range      | 30~40 m Smart IR LED Technology                                                                                |
| D/N Filter              | IR cut filter with auto switch                                                                                 |
| Min Illumination        | Color: 0.01 Lux(AGC on) - B/W: 0.0 Lux(IR on)                                                                  |
| Angle of View           | H-FOV: 85°, V-FOV: 44°, D-FOV: 89°                                                                             |
| Night Vision            | IR                                                                                                             |
| Picture Adjust          |                                                                                                                |
| Picture Function        | DWDR, BLC, HLC, Defog, ROI, Rotate                                                                             |
| Shutter Speed           | Manual (1/3 ~ 1/10,000), Auto                                                                                  |
| Image Parameter Control | Off, On, Timing (Adjust 0 ~ 255)                                                                               |
| D/N Control             | Timing, Auto, Color on, Color off                                                                              |
| S/N                     | > 52dB                                                                                                         |
| Image Parameter         | Saturation, Brightness, Contrast, Sharpness, Hue                                                               |
| Video / Audio           |                                                                                                                |
| Video Compression       | H.264+(Ultra H.264), H.265+ (Ultra H.265)                                                                      |
| Audio Compression       | N/A                                                                                                            |
| Frame Rate(60Hz)        | 20fps@ 5MP, 25fps@ 4MP, 30fps@ 2MP                                                                             |
| Transmission Stream     | Triple Stream (Video Bit Rate:11 Kbps~10 Mbps)                                                                 |
| Network                 |                                                                                                                |
| Protocols               | TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, IPv6, RTMP, NAT |
| Compatibility           | Onvif Ver2.6, Profile S, CGI, SDK, API                                                                         |
| Streaming Method        | Unicast, Multicast                                                                                             |
| Web Viewer              | Internet Explorer                                                                                              |
| Smart Device            | iOS, Android Phone & Tablet                                                                                    |

| Function             |                                                               |
|----------------------|---------------------------------------------------------------|
| Recording            | NVR, CMS, VMS                                                 |
| Record Type          | Manual, Motion Detection, Smart Detection, Schedule           |
| Alarm Triggers       | N/A                                                           |
| Event Action         | Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message |
| Event                | Smart Motion Detection, Video Shelter                         |
| Intelligent Function | N/A                                                           |
| Interface            |                                                               |
| Network              | 1 RJ45 (10M / 100M) Ethernet Port                             |
| Audio                | Internal Mic                                                  |
| Alarm                | N/A                                                           |
| CVBS                 | N/A                                                           |
| Power                | PoE LAN, DC In                                                |
| Control              | N/A                                                           |
| Memory Slot          | N/A                                                           |
| General              |                                                               |
| IP Rating            | IP67, 2KV Surge Protection                                    |
| Power Supply         | DC12V ± 10%                                                   |
| POE Supply           | IEEE802.3af - Max 6.5 Watt                                    |
| Web Language         | English, Persian                                              |
| Dimension            | 152*65 mm                                                     |
| Weight               | 365 g                                                         |
| Operation Humidity   | Humidity 95% or less (non-condensing)                         |
| Operation Temp       | -30°C ~ +60°C                                                 |
| Guarantee            |                                                               |
| Product Guarantee    | 3 Years Platinum Guarantee                                    |
| MTBF                 | 100K hrs min. MIL-HDBK-217F (25°)                             |
| Certificates         | EN, CN, FCC, CFR                                              |