

# KI-B47SE50A-i50SLM

Strobe Light




## قابلیت های هوشمند

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص حرکت سریع افراد
- تشخیص چهره

- سه سال گارانتی پلاتینیوم
- بدون قید و شرط کی دی تی
- چهار سال ضمانت پایداری
- کیفیت تصویر

## سایر برتری ها

- پشتیبانی از میکرو SD با ظرفیت 256Gb
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog
- پشتیبانی از ضبط اضطراری ANR
- امکان سفارش با نرم افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهینامه.

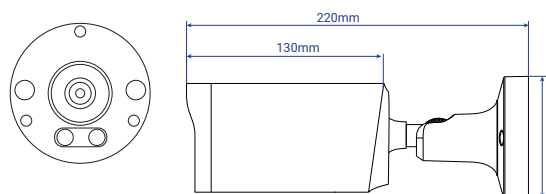

| Camera                  |                                                                                                                                                                      |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor            | 5MP Progressive scan Cmos Sensor (1/2.7")                                                                                                                            |
| CPU                     | Dual-Core ARM Cortex-A7@900 MHz                                                                                                                                      |
| Lens                    | 2.7~13.5 mm @F1.6, Motorized Fast Auto Focus Lens                                                                                                                    |
| Resolution              | 2880*1620 (5MP)                                                                                                                                                      |
| Available IR Range      | 50~60 m Smart IR SMD Technology<br>Smart White light Technology                                                                                                      |
| D/N Filter              | IR cut filter with auto switch                                                                                                                                       |
| Min illumination        | Color: 0.01 lux(AGC on) - B/W: 0.0 Lux(IR on)                                                                                                                        |
| Angle of View           | H-FOV: 94°, V-FOV: 69°, D-FOV: 96°                                                                                                                                   |
| Night Vision            | Color /IR                                                                                                                                                            |
| Picture Adjust          |                                                                                                                                                                      |
| Picture Function        | 120dB WDR/DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog, Rotate                                                                                                              |
| Shutter Speed           | Manual (1/3 ~ 1/100.000), Auto                                                                                                                                       |
| Image Parameter Control | Off, On, Timing (Adjust 0 ~ 255)                                                                                                                                     |
| D/N Control             | Timing, Auto, Color on, Color off                                                                                                                                    |
| S/N                     | > 52dB                                                                                                                                                               |
| Image Parameter         | Saturation, Brightness, Contrast, Sharpness, Hue                                                                                                                     |
| Video / Audio           |                                                                                                                                                                      |
| Video Compression       | H.264+(Ultra H.264), H.265+ (Ultra H.265)                                                                                                                            |
| Audio Compression       | G.711A, G.711U                                                                                                                                                       |
| Frame Rate(60Hz)        | 30fps@ 5MP (2592*1944), 25fps@ 3MP, 30fps@ 2MP                                                                                                                       |
| Transmission Stream     | Triple Stream (Video Bit Rate:11 Kbps~10 Mbps)                                                                                                                       |
| Network                 |                                                                                                                                                                      |
| Protocols               | TCP/IP(v4, v6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, SNMP (v1, v2, v3), UDP, NAT, Multicast, RTMP |
| Compatibility           | Onvif Ver2.6, Profile S, G, T, CGI, SDK, API                                                                                                                         |
| Streaming Method        | Unicast, Multicast                                                                                                                                                   |
| Web Viewer              | IE, Edge, Firefox, Chrome                                                                                                                                            |
| Smart Device            | IOS, Android Phone & Tablet                                                                                                                                          |

| Function             |                                                                                                                                  |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Recording            | FTP, NVR, CMS, SD Card, <b>ANR</b>                                                                                               |
| Record Type          | Manual, Motion Detection, Smart Detection, Schedule                                                                              |
| Alarm Triggers       | All Intelligent Function                                                                                                         |
| Event Action         | Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message, Smart Light                                                       |
| Event                | Smart Motion Detection, Video Shelter                                                                                            |
| Intelligent Function | <b>6 Smart Function</b><br>Line Crossing Detection, Area Intrusion, Region Entrance, Region Exiting, Fast Moving, Face Detection |
| Interface            |                                                                                                                                  |
| Network              | 1 RJ45 (10M / 100M) Ethernet Port                                                                                                |
| External Audio       | N/A                                                                                                                              |
| Internal Audio       | <b>Internal Mic</b>                                                                                                              |
| Alarm                | N/A                                                                                                                              |
| CVBS                 | N/A                                                                                                                              |
| Power                | <b>PoE</b> LAN, DC In                                                                                                            |
| Reset Button         | Yes ( <b>Optional</b> )                                                                                                          |
| Memory Slot          | Yes - Micro SD/SDHC/SDXC Slot ( <b>256 Gb Max</b> ) ( <b>ANR Support</b> )                                                       |
| General              |                                                                                                                                  |
| Protection Rating    | <b>IP67, IK10</b> , 6KV Surge Protection                                                                                         |
| Power Supply         | DC12V ± 10%                                                                                                                      |
| POE Supply           | <b>IEEE802.3af - Max 11 Watt</b>                                                                                                 |
| Web Language         | English, <b>Persian</b>                                                                                                          |
| Dimension            | 220*76 mm                                                                                                                        |
| Weight               | 450 g                                                                                                                            |
| Operation Humidity   | Humidity 95% or less (non-condensing)                                                                                            |
| Operation Temp       | -30°C ~ +60°C                                                                                                                    |
| Guarantee            |                                                                                                                                  |
| Product Guarantee    | 3 Years Platinum Guarantee                                                                                                       |
| MTBF                 | 100K hrs min. MIL-HDBK-217F (25°)                                                                                                |
| Certificates         | EN, CN, FCC, CFR                                                                                                                 |