


KI-S500LM40Z38-i600TSW



سایر برتری‌ها

- پشتیبانی از میکرو SD با ظرفیت 128GB
- بدنه ضد آب و گرد و غبار با درجه IP67
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog, ROI و تا ۸ ناحیه

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

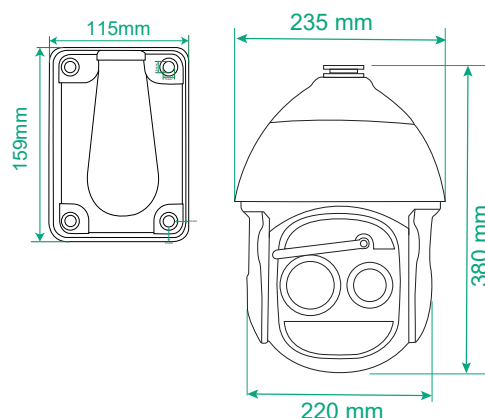

Camera	
Image Sensor	4MP Super Starlight (Sony-Japan) Progressive scan Cmos Sensor (1/1.8")
CPU	Dual-Core ARM Cortex-A7@900MHz
Lens	38X Optical Lens (6-8~260 mm) (F-Stop F1.5~F4.8)
Resolution	2688*1520 (4MP)
Available IR Range	600 m Smart Optical Laser IR Technology
D/N Filter	IR Cut Filter Switch (ICR)
Min illumination	Color: 0.0001 Lux (AGC on) - B/W: 0.0 Lux(IR on)
PTZ	Pan Range: 360° Endless - Pan Speed: 0.1°~240°/S Tilt Range: -10°~100° - Tilt Speed: 0.1°~180°/S Number of Preset: 255 - Patrol: 4 - Pattern: 8 - Park Action: Yes
Night Vision	Super Starlight Technology
Picture Adjust	
Picture Function	120dB WDR, DWDR, BLC, HLC, Ofog, ROI
Image Stabilization	Yes(DIS)
Optical Defog	Yes
Digital Zoom	16X
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265)
Audio Compression	G.711A, G.711U
Frame Rate(60Hz)	30fps@(2688*1520)
Transmission Stream	Triple Stream (Code Rate: 128kbps-16mbps)
Network	
Protocols	HTTPS, HTTP, TCP/IP V4-V6 , ICMP, RTSP, UDP, NTP, DHCP, DDNS, FTP, SNMP-V1-V2-V3, Multi Cast
Compatibility	Onvif Ver2.6 , Profile S, G, T, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer

Function	
Recording	FTP, NVR, CMS,VMS, SD Card
Record Type	Manual, Motion Detection, Schedule
Alarm Triggers	N/A
Event Action	Email, PTZ, Snapshot, Recording, Alarm Out
Event	Motion Detection, Video Shelter
Intelligent Function	N/A
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
Audio	Audio Out, Audio In
Alarm	Alarm Out, Alarm In
CVBS	N/A
Power	PoE LAN, DC/AC In
Reset Button	N/A
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (128 Gb Max)
General	
Protection Rating	IP67, IK10, 6KV Surge Protection
Cover Lens	Nano Glass
Wiper	Yes
Power Supply	AC24 V ± 25% (4A Max)
POE Supply	IEEE802.3at-Max 30 Watt
Web Language	English, Persian
Dimension	380*235 mm
Weight	8 kg
Case Size	8"
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +70°C
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)